
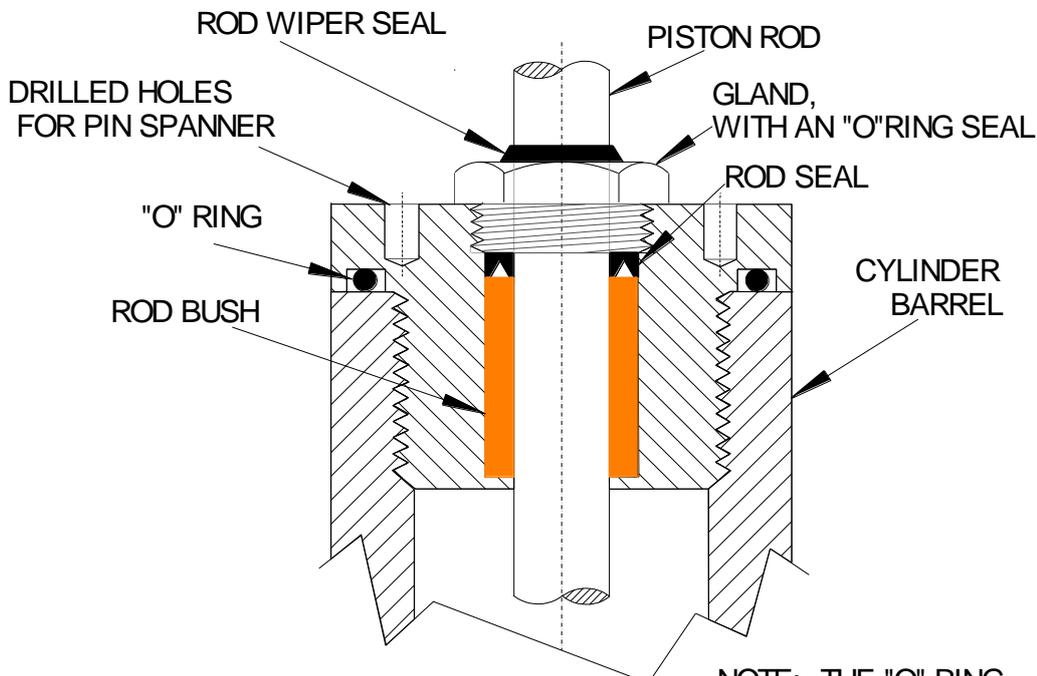


CYLINDER WITH THREADED ROD END CAP

HEXAGON MACHINED
INTEGRAL WITH
ROD END CAP,
WHERE APPLICABLE.

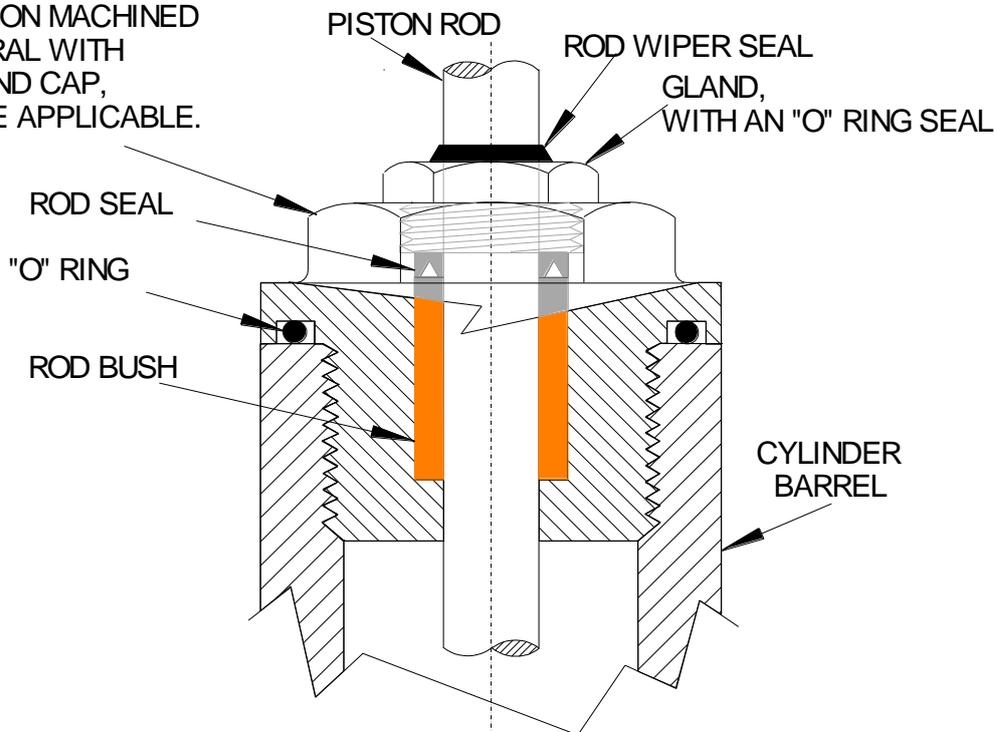

NOTE:- THE "O" RING
SEALS ENSURE THE
THREADS ARE LUBRICATED
AND OF COURSE, NO
MOISTURE ENTERS THE
THREADS EITHER.

IT IS IMPORTANT TO NOTE THAT THE ROD SEAL
IS POSITIONED SO THAT THE ROD BUSH IS
LUBRICATED WITH THE HYDRAULIC FLUID.